

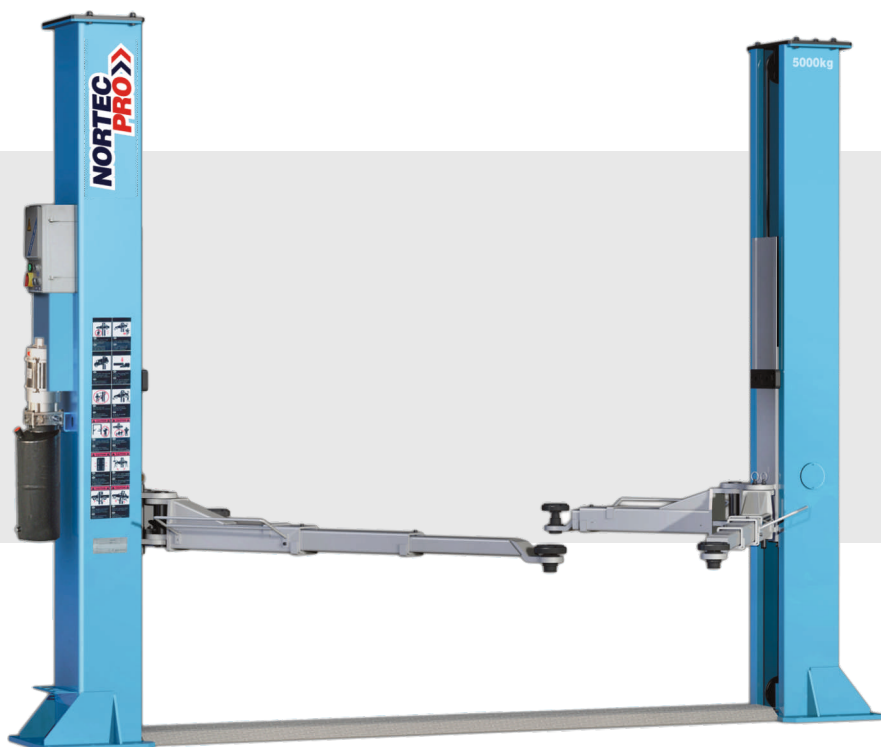


## PD5000


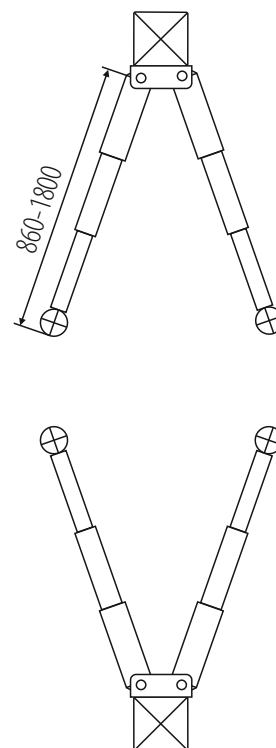


|                      |               |
|----------------------|---------------|
| CAPACITY:            | 5000 kg       |
| POWER SUPPLY:        | 400V/50Hz     |
| MOTOR POWER:         | 2,6 kW        |
| LIFTING HEIGHT:      | 1900 mm       |
| CLEARANCE:           | 2810 mm       |
| 3-STAGE ARMS:        | 860-1800 mm   |
| OIL PRESSURE:        | 20 MPa        |
| NOISE LEVEL:         | <70 dB        |
| WEIGH:               | 950 kg        |
| SIZE OF THE PACKAGE: | 60x320x110 cm |

Electrohydraulic lift ♦ mechanical synchronization at floor level ♦ electromagnetic height lock  
 ♦ automatic arm lock during lifting ♦ set of door protection ♦ 180mm adapters in standard  
 ♦ safe 24V voltage control ♦ extreme and safe sensors trolley positions ♦ hydraulic safety device in the event of sudden oil leakage or overload.

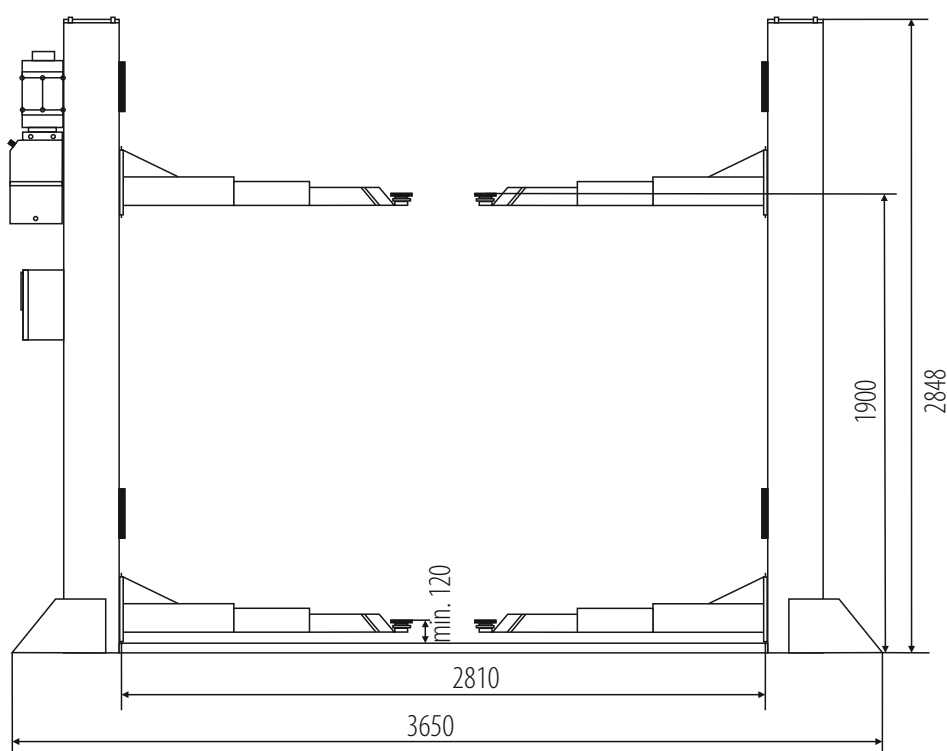

## PD5000

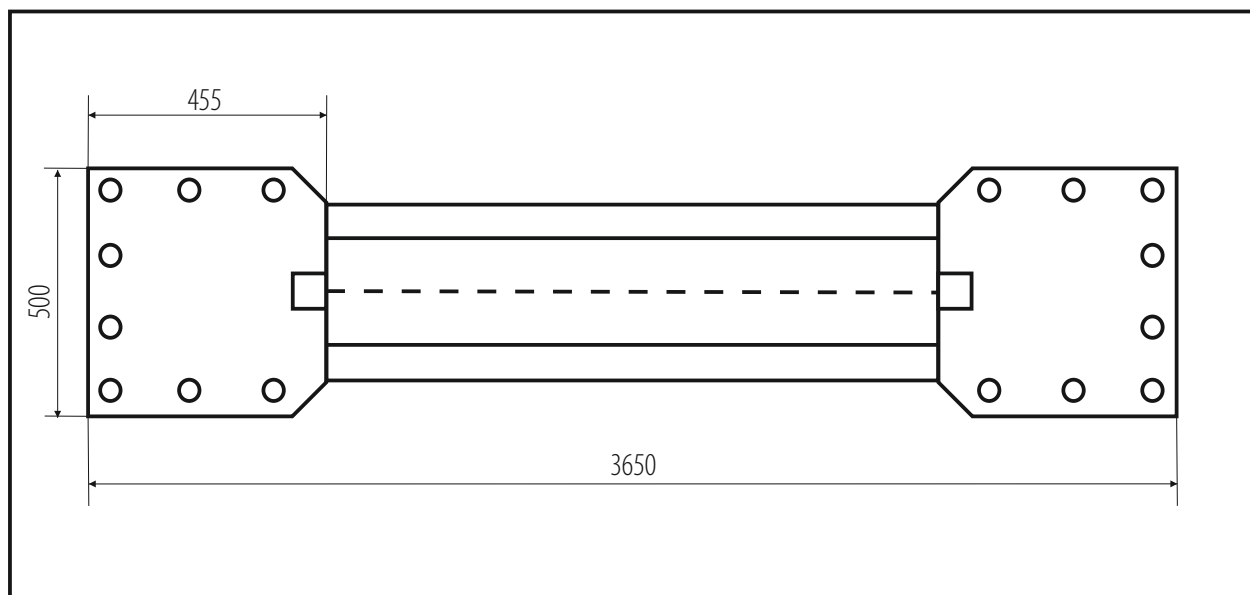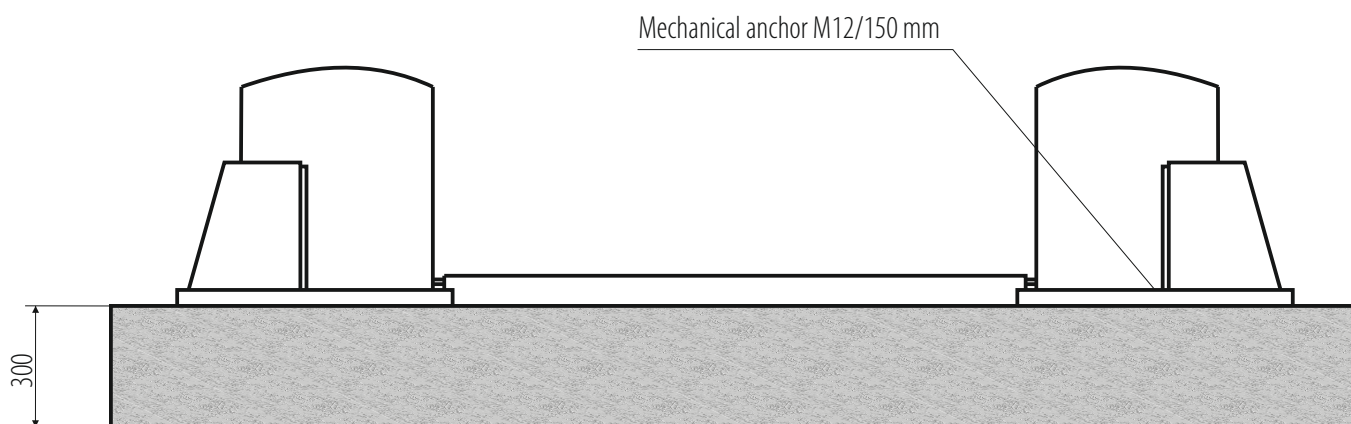

FLOOR DIMENSIONS: 4150x1500mm

### INSTALLATION REQUIREMENTS:



Concrete class: B25 or C20 / 25 with a minimum mounting area: 4150x1500x300mm ♦ Acceptable floor imbalance: +/- 5mm, floor execution: 3 weeks before assembly ♦ Mounting anchors: mechanical M12 / 150 mm 16 pieces or chemical M16 / 250mm ♦ Hydraulic oil: HL46, 10.0l ♦ Power supply: 5x2.5mm cable to the place of assembly ♦ Current protection: min. 32A with 3-phase 400V / 50Hz power supply.

Installation allowed only in closed areas ♦ prohibition of using reinforcement 20 cm from the top thicker than 4mm<sup>2</sup> ♦ assembly for chemical anchors for an additional fee (submit in advance, preferably when setting the date of assembly) ♦ All connections, with particular reference to electrical connections, they must be made by authorized persons ♦ The installation must remain carried out by qualified personnel according to the rules attached in this building plan ♦ In the case of assembly by Nortec or its authorized service center, the lift must be on solid ground.