

MC905




| | |
|----------------------------|--------------|
| POWER SUPPLY: | 400V/50Hz |
| PUMP MOTOR POWER: | 4,0 kW |
| TRANSMISSION ENGINE POWER: | 2,6 / 3,2 kW |
| RIM DIAMETER: | 14" - 58" |
| RIM WIDTH: | 1500 mm |
| MAX. WHEEL DIAMETER: | 2600 mm |
| WEIGHT: | 1600 kg |
| NOISE LEVEL: | < 70 dBA |

Designed for mounting and dismounting of tubeless and tubed tires
 ♦ For handling wheels of heavy trucks, agricultural, construction and industrial machinery
 ♦ Two rotational speeds of the head ♦ Sliding gripper with head ♦ Specially profiled hammer disc allows for efficient operation dismantling the tire without the risk of damaging it ♦ Alloy rim protection in standard ♦ Safe control voltage (24V) eliminates the risk of electric shock




AUTOMATIC TOOL ROTATION

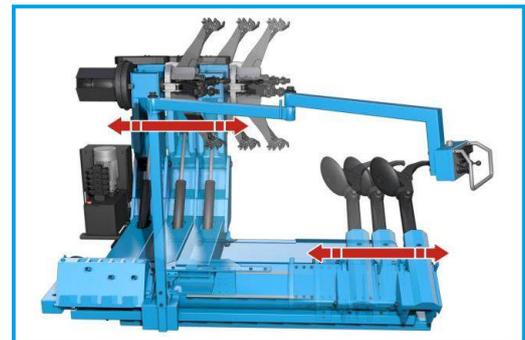

SLIDING GRIPPER WITH HEAD



AUTOMATIC ARM POSITIONING

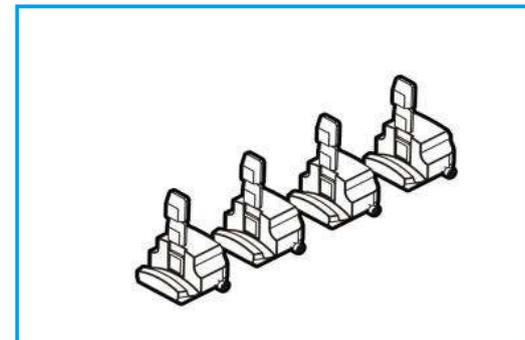

ALLOY RIM PROTECTION IN STANDARD