



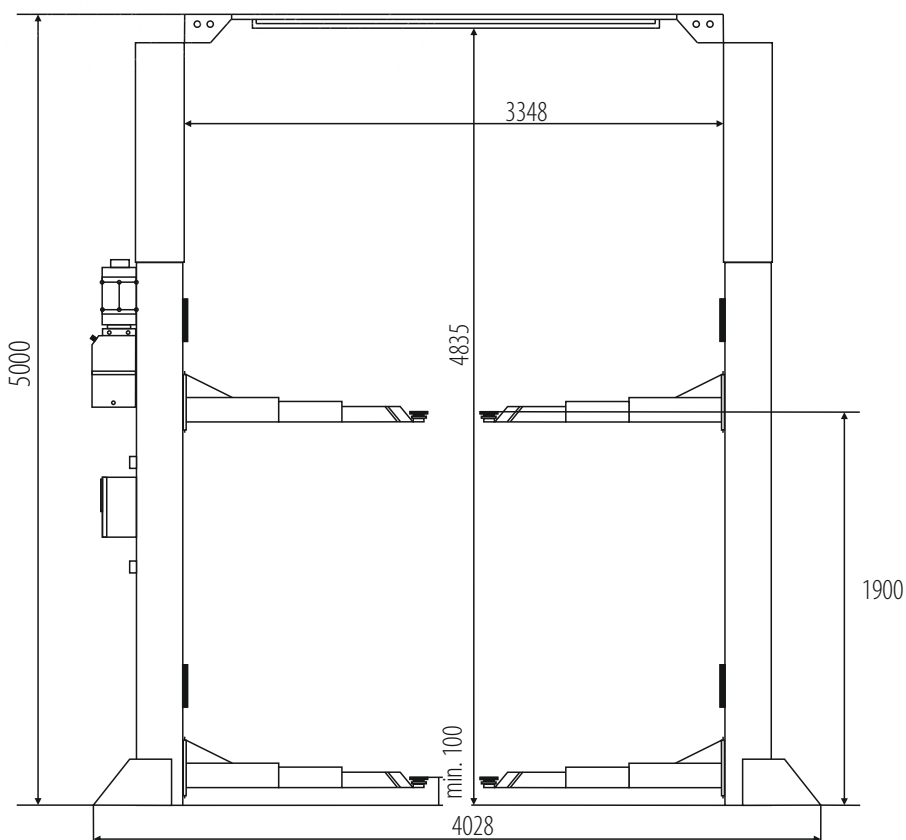


## PD5500C

CAPACITY:	5500 kg
POWER SUPPLY:	400V/50Hz
MOTOR POWER:	3,0 kW
LIFTING HEIGHT:	1900 mm
MACHINE HEIGHT:	5000 mm
CLEARANCE:	3348 mm
3-STAGE ARMS:	890 - 1800 mm
OIL PRESSURE:	16 MPa
NOISE LEVEL:	<80 dB

Baseless electrohydraulic 2 post lift ♦ Mechanical synchronization  
 ♦ electromagnetic height lock ♦ automatic arm lock during lifting  
 ♦ 3-stage arms in the range of 890 / 1300 / 1800 mm  
 ♦ set of door protection.

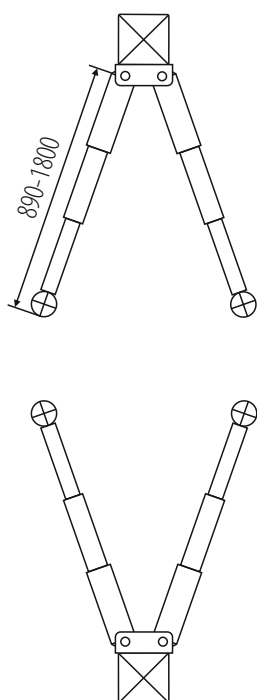

## PD5500C

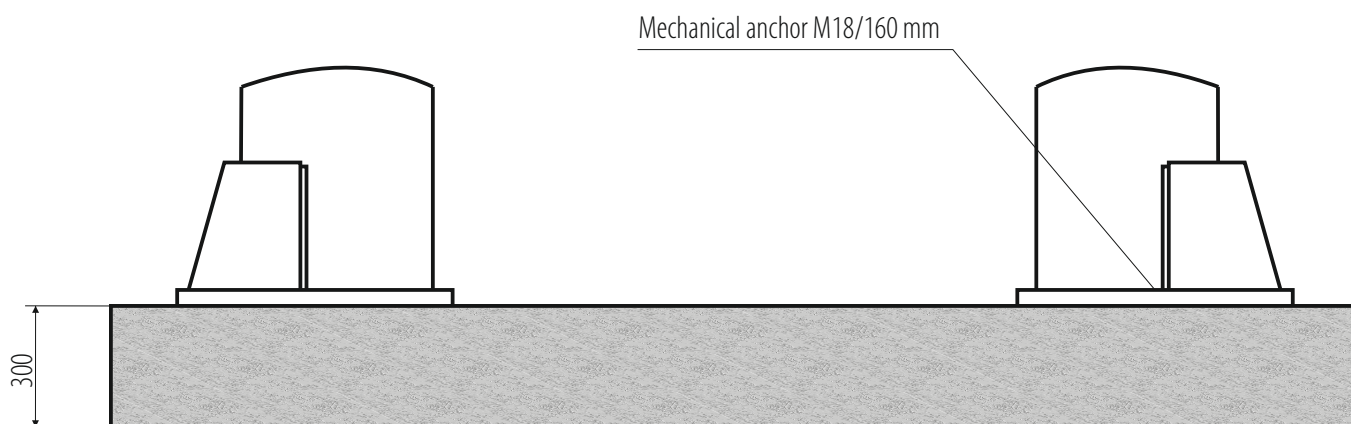

FLOOR DIMENSIONS: 5200x1800mm

### INSTALLATION REQUIREMENTS:



Concrete class: B25 or C20 / 25 with a minimum mounting area: 5200x1800x300mm ♦ Acceptable floor imbalance: +/- 5mm, floor execution: 3 weeks before assembly ♦ Mounting anchors: mechanical M18 / 160 mm 14 pieces or chemical M16 / 250mm ♦ Hydraulic oil: HL32, 10.0l ♦ Power supply: 5x2.5mm cable to the place of assembly ♦ Current protection: min. 32A with 3-phase 400V / 50Hz power supply.

Installation allowed only in closed areas ♦ prohibition of using reinforcement 20 cm from the top thicker than 4mm<sup>2</sup> ♦ assembly for chemical anchors for an additional fee (submit in advance, preferably when setting the date of assembly) ♦ All connections, with particular reference to electrical connections, they must be made by authorized persons ♦ The installation must remain carried out by qualified personnel according to the rules attached in this building plan ♦ In the case of assembly by Nortec or its authorized service center, the lift must be on solid ground.